


POWER: 60VA

Features

- Epoxy resin cast
- Two chambers bobbin
- Insulation primary-secondary: 4KV-1p
- Increased humidity resistance

Manufacturing standard: EN 61558

- Safety insulation transformer
- Max. ambient temperature: t_a 50°C
- Insulation class: B 130°C
- Double insulated
- Degree of protection: IP00
- Conditionally short-circuit safe

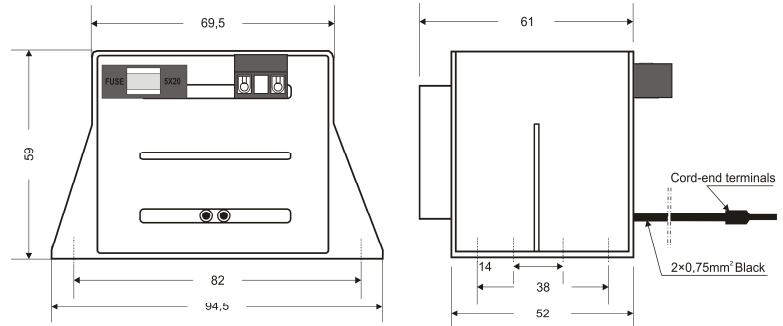

Application

- For power supply of safeguarding centres
- For power supply of other electrical devices

Usage features

- Direct fixing possibility to metal part.
- Built-in primary fuse.
- Terminal block connection at primary side with max. 1.5 mm² wire
- Connection at secondary side with 0.75 mm² and 40 cm long wire

Model number	Primary voltage	Secondary voltage	Secondary current
ME.TRE-60.66412/BSV 60VA	230V-50Hz	12V	5,00 A
ME.TRE-60.66416/BSV 60VA	230V-50Hz	16.5 V	3,63 A
ME.TRE-60.66418/BSV 60VA	230V-50Hz	18 V	3,33 A
ME.TRE-60.66424/BSV 60VA	230V-50Hz	24 V	2,50 A
ME.TRE-60.66440/BSV 60VA	230V-50Hz	40 V	1,50 A
Prescribed primary circuit fuse: 400 mA T			
Tolerance of secondary voltage: 5%			